

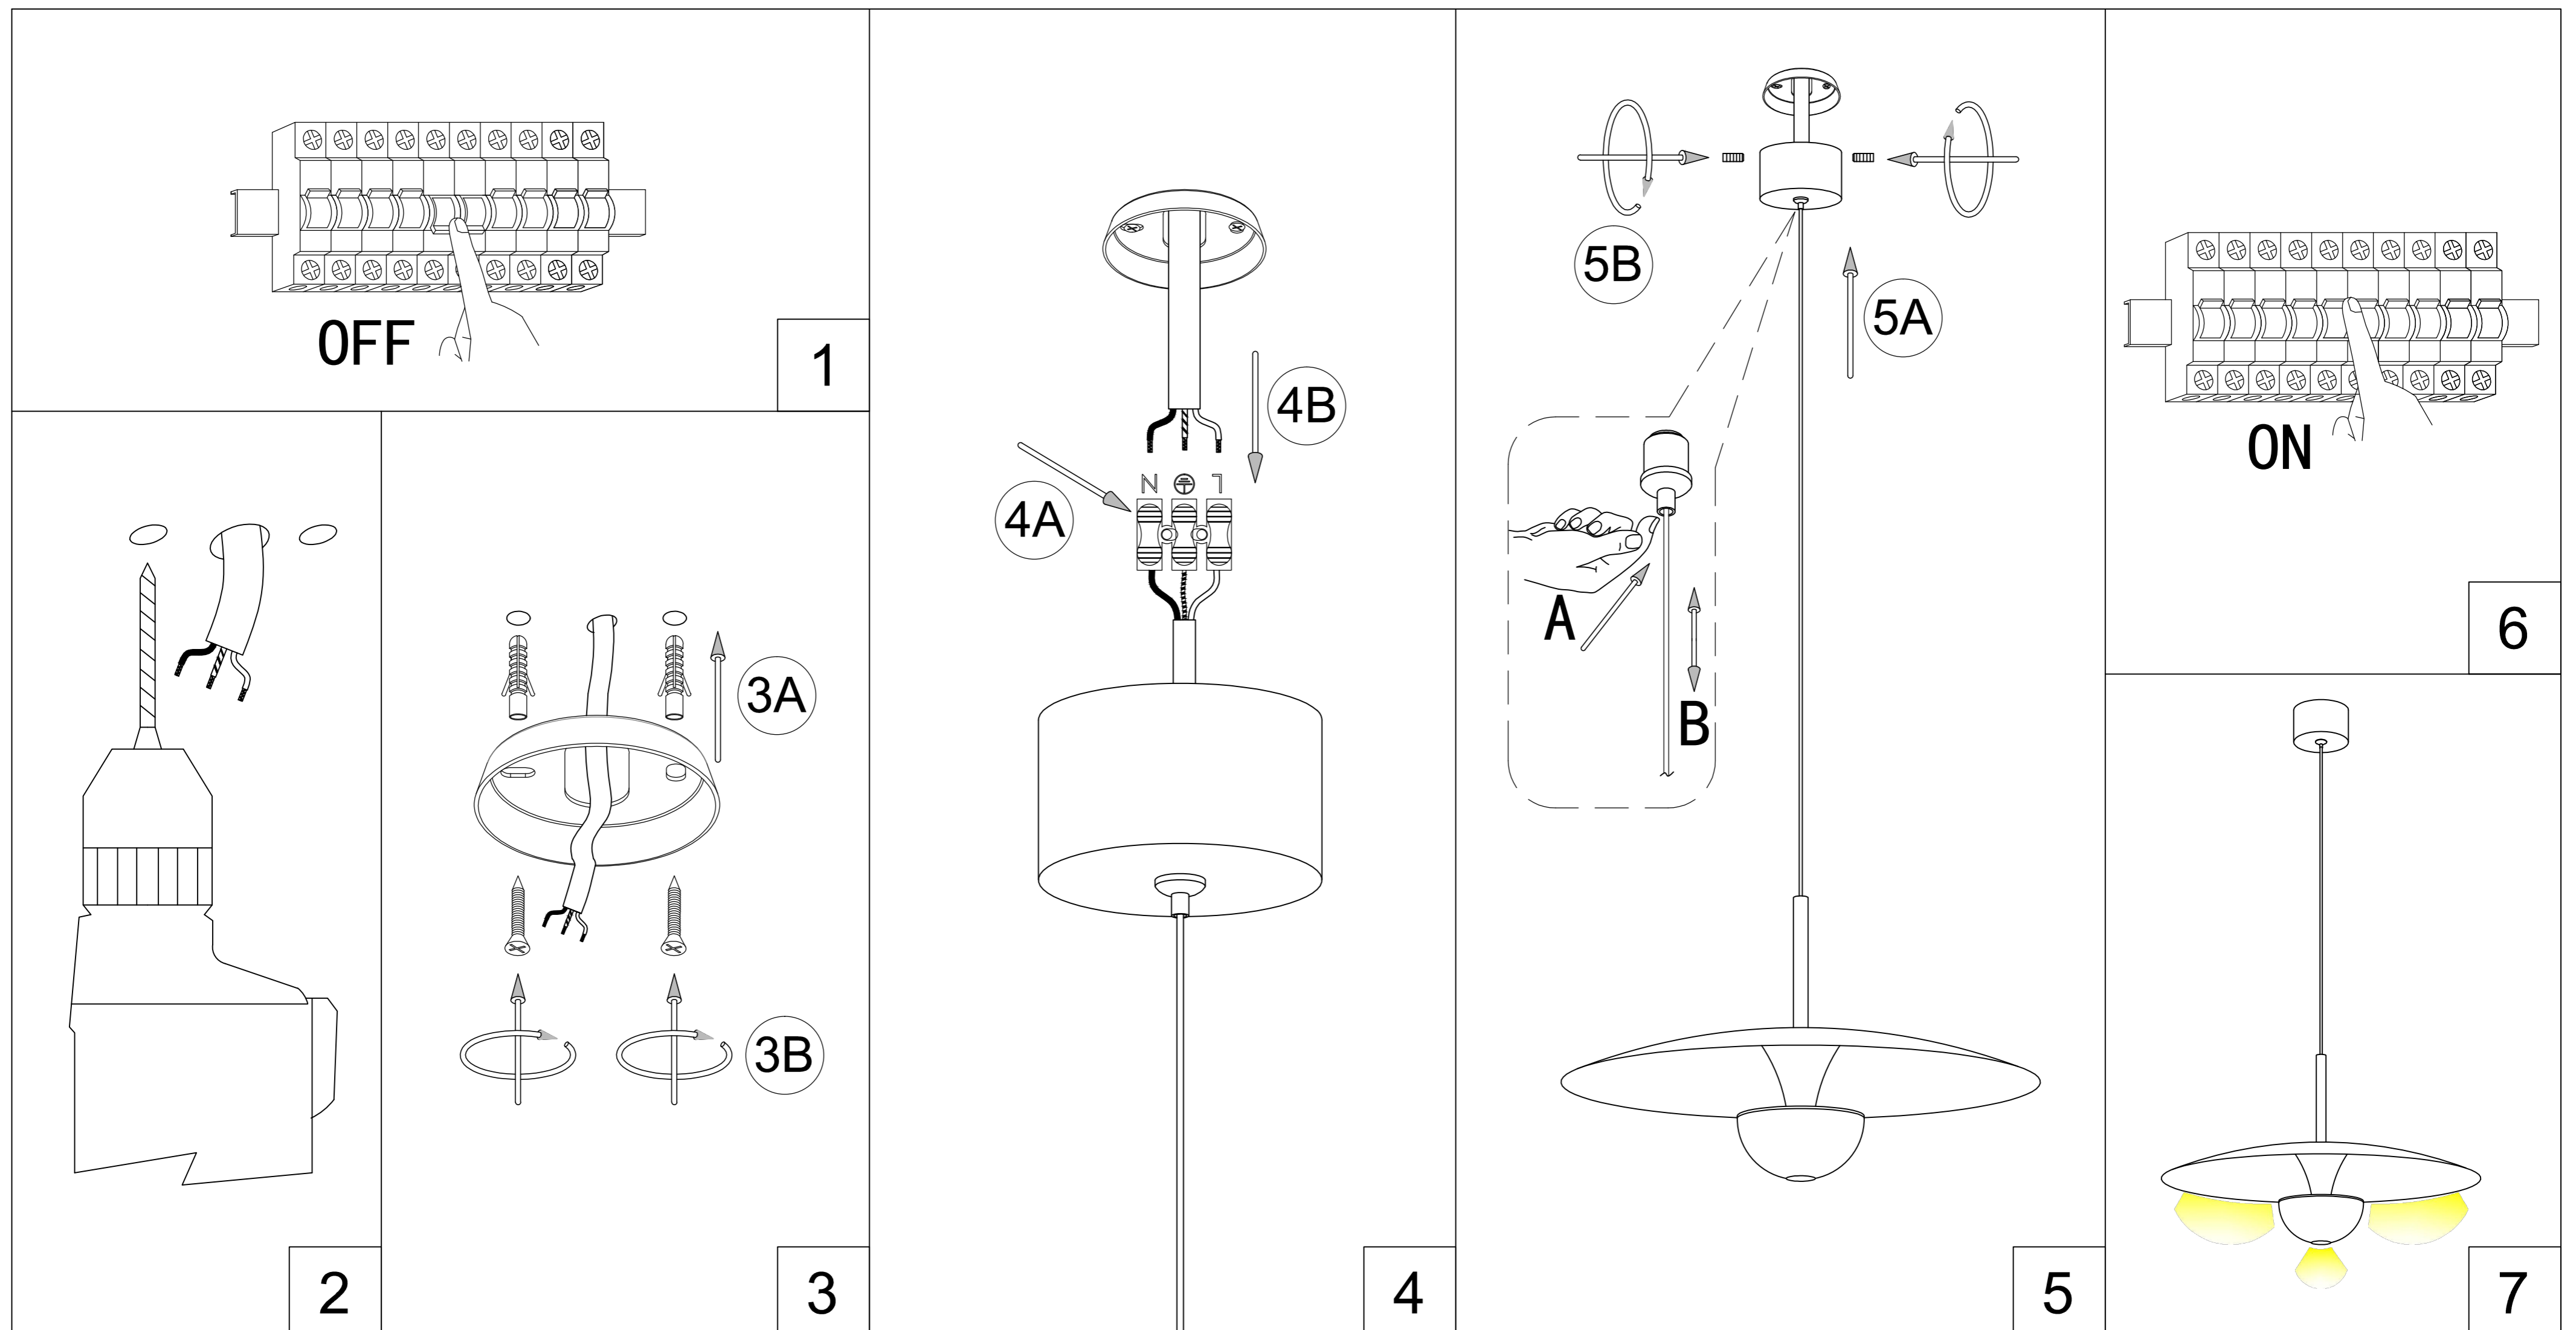
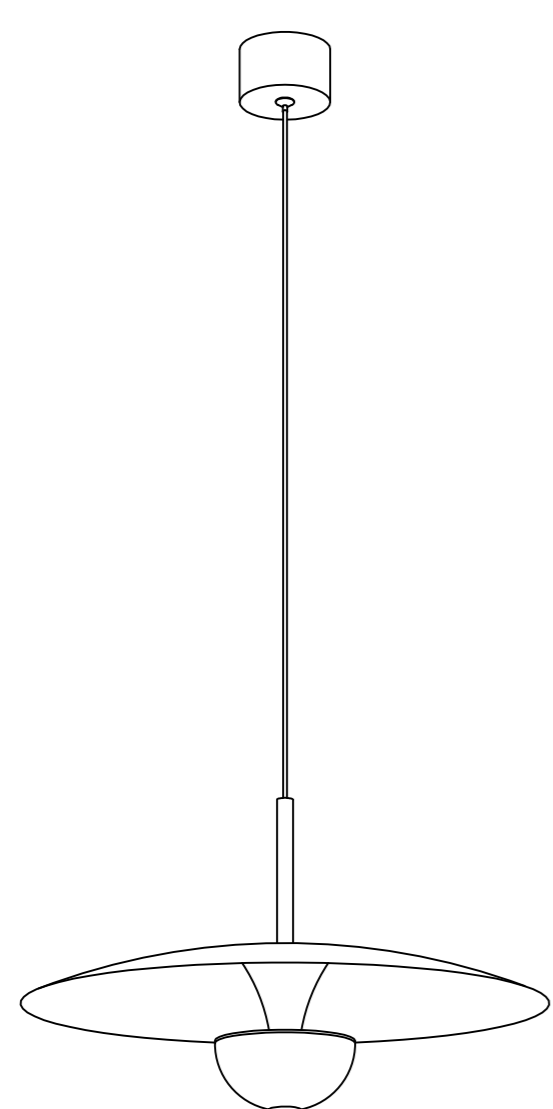





PL703 PL704


USER MANUAL LED PENDENTS



- 01.SWITCH OFF MAIN
- 02.MAKE HOLE PATTERN
- 03.INSTALL THE BASE PLATE
- 04.CONNECT LAMP TO THE MAIN
- 05.DRIVE IN THE SCREWS UNTILL TIGHT
- 06.ADJUST BEAMING
- 07.SWITCH ON THE MAIN AND LIGHT ON



PL703
D380xH2000(mm)
LED-6W+6W

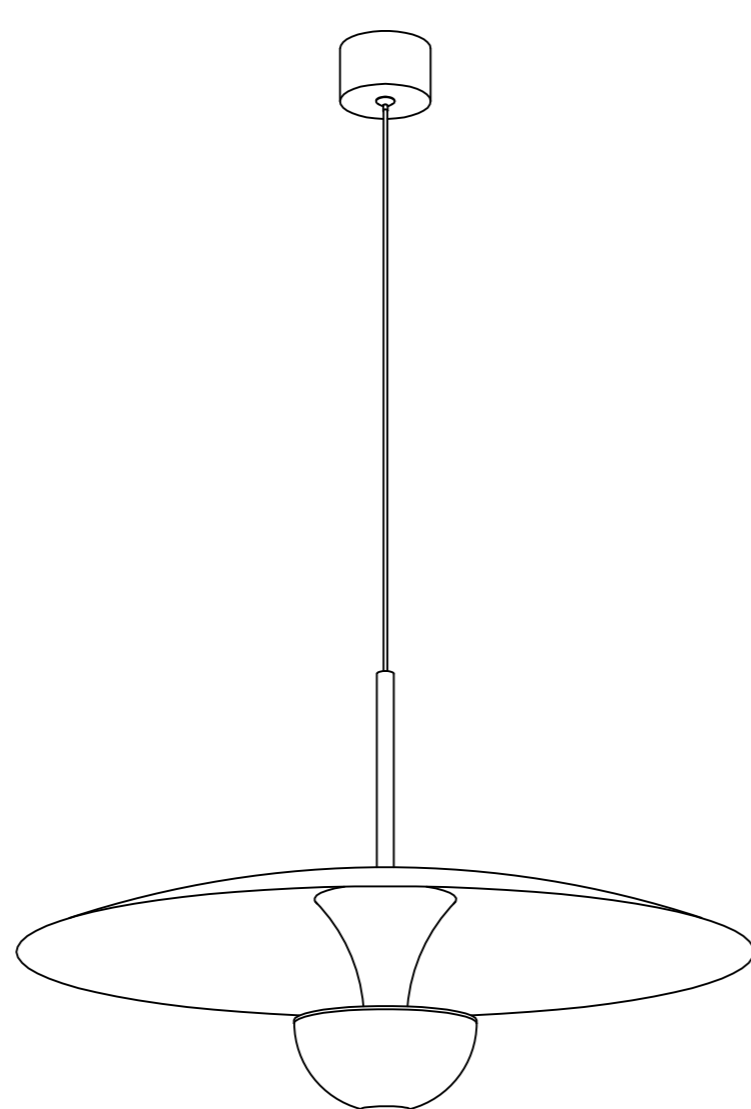

PL704
D530xH2000(mm)
LED-6W+6W

Lamp : SMD 2835+CREE COB LED
 Color : 2700K/3000K/4000K/6000K
 Color rendering : Ra80
 Input : 220V-240V AC
 Current : Constant 300mA
 Frequency : 50/60Hz
 Watt : 6W+6W
 Life span : 20,000hrs
 Operating temp : -20°C--+40°C
 Indoor use only
 IP20
 Dimmable : NO

Cautions: a.Installed by qualified electrician
 b.Use only power-supply supplied
 by manufacturer for products guarantee