

RECTA-1

Outdoors lighting fixtures, SMD
Good heat dissipation structure design.
Elegant appearance and concise.



Luminaire

Product type	Spotlights
Material	Diecast Aluminum
Colour	Black,White

Installation

Environment	Outdoors
IP	44
Mounting	Recessed

LightSource


Luminous flux	335lm/355 lm
Power	5W
Typical voltage	12V
CRI	90
CCT	2700K/3000K/4000K

Optics

Light controller type	lens:20° / 40° / 60°
-----------------------	----------------------

Driver

Input voltage(V)	220-240V
Power Factor	0.76C
Output current	500mA
Dimming Type	On/Off

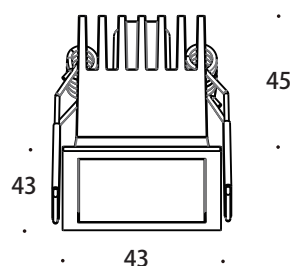

RECTA-2

Outdoors lighting fixtures, SMD
Good heat dissipation structure design.
Elegant appearance and concise.



Luminaire

Product type	Spotlights
Material	Diecast Aluminum
Colour	Black,White

Installation

Environment	Outdoors
IP	44
Mounting	Recessed

LightSource



Luminous flux	737 lm/831 lm
Power	10W
Typical voltage	24V
CRI	90
CCT	2700K/3000K/4000K

Optics

Light controller type	lens:20° / 40° / 60°
-----------------------	----------------------


Driver

Input voltage(V)	220-240V
Power Factor	0.78C
Output current	500mA
Dimming Type	On/Off

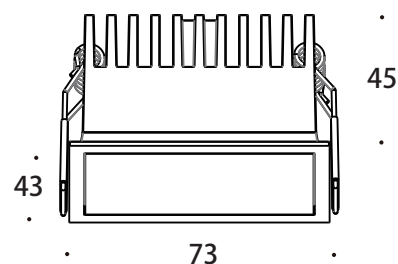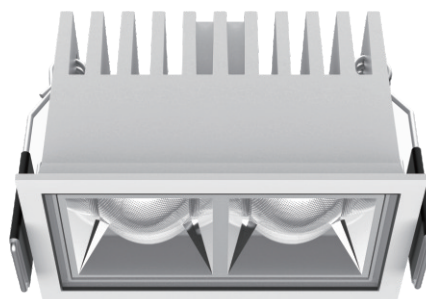

RECTA-3

Outdoors lighting fixtures, SMD Good heat dissipation structure design. Elegant appearance and concise.



Luminaire

Product type	Spotlights
Material	Diecast Aluminum
Colour	Black,White

Installation

Environment	Outdoors
IP	44
Mounting	Recessed

LightSource

Luminous flux	1269.7 lm
Power	15W
Typical voltage	36V
CRI	90
CCT	2700K/3000K/4000K

Optics

Light controller type	lens:20° / 40° / 60°
-----------------------	----------------------

Driver

Input voltage(V)	220-240V
Power Factor	0.81C
Output current	500mA
Dimming Type	On/Off

