WA497

1 OFF

3 3A 3B

2

4 4A 4B

5 5A 5B

6 ON

7

Accessories	Accessories
expansion plug 2pcs
screw 2pcs	connector 3pcs

1. SWITCH OFF MAIN
2. MAKE HOLE PATTERN
3. INSTALL THE BASE PLATE
4. CONNECT LAMP TO THE MAIN
5. DRIVE IN THE SCREWS UNTILL TIGHT
6. SWITCH ON THE MAIN AND LIGHT ON
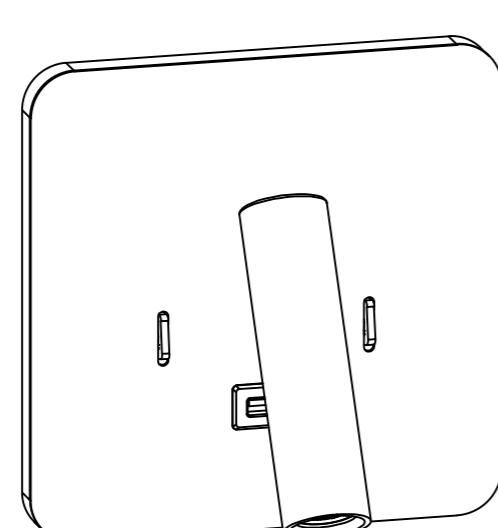
WA497
L160xW160xH81(mm)
LED-4+3W
SUB(Max-2.1A)

Lamp：SMD-2835 LED/CREE XPE LED
Color：2700K/3000K/4000K/6000K
Color rendering：Ra80
Input：220V-240V AC
Current：Constant 300mA/700mA
Frequency：50/60Hz
Watt：4W+3W
USB charging 5V / 2.1A
Life span：20,000hrs
Operating temp：-20℃-+40℃
Indoor use only
IP20
Dimmable：NO

Cautions: a.Installed by qualified electrician
　　　　　 b.Use only power-supply supplied
　　　　　　 by manufacturer for products guarantee