

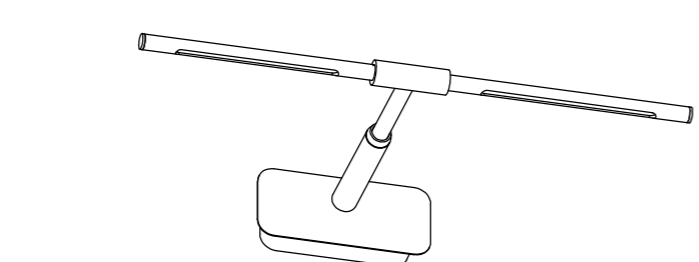







1. SWITCH OFF MAIN
2. MAKE HOLE PATTERN
3. INSTALL THE BASE PLATE
4. CONNECT LAMP TO THE MAIN
5. DRIVE IN THE SCREWS UNTILL TIGHT
6. SWITCH ON THE MAIN AND LIGHT ON



WA504
L400xW60xH240(mm)
LED-4W

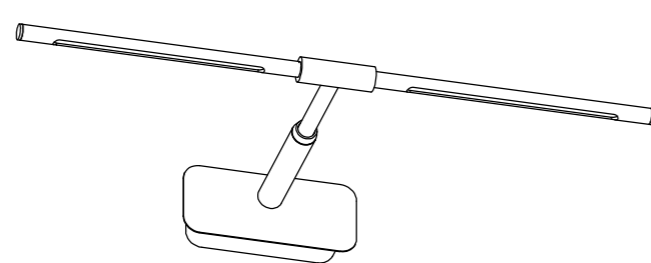

WA505
L500xW60xH240(mm)
LED-4W

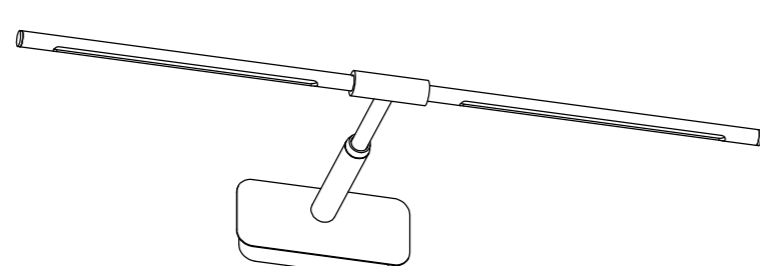

WA506
L600xW60xH240(mm)
LED-6W

Lamp : SMD-2835 LED
 Color : 2700K/3000K/4000K/6000K
 Color rendering : Ra80
 Input : 100V-240V AC
 Current : Constant 300mA
 Frequency : 50/60Hz
 Watt : 4W/6W
 Life span : 20,000hrs
 Operating temp : -20°C --+40°C
 Indoor use only
 IP20
 Dimmable : NO

Cautions: a. Installed by qualified electrician
 b. Use only power-supply supplied by manufacturer for products guarantee