


Arke 400

LL14101B1



Lombardo.

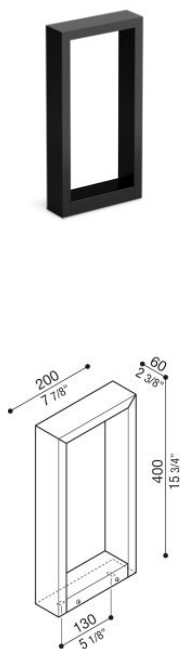

Technical information:

Installation:	Ground, Post ground
Material:	Aluminium
Finish:	Black RAL 9005
Treatment:	Sea Treatment
Diffuser type:	Transparent glass
Lamp type:	LED
Colour temperature:	2200K
CRI:	>90
LB Factor:	L80B20 - 50.000h
Step MacAdam:	3
Photobiological risk:	RG1
Power consumption (Watt):	6,5
Lumen:	570
Real Lumen:	350
Power supply:	✓ integrated
LED:	AC DIRECT
Insulation class:	⊕ CL.I
Type of protection:	IP 66
Resistance to breakage:	IK 06 1J xx3
Standards and Marks of Conformity:	CE UK CA
Dimming	Phase cut



Arke 400

LL14101B1

Lombardo.



Installation images:



Lombardo S.r.l.

Via Pizzigoni 3, Villongo (BG) - 24060 - Italy - T 0039 035 939 411 - E info@lombardo.it


lombardo.it

Arke 400

LL14101B1


Lombardo.

Lighting simulation:

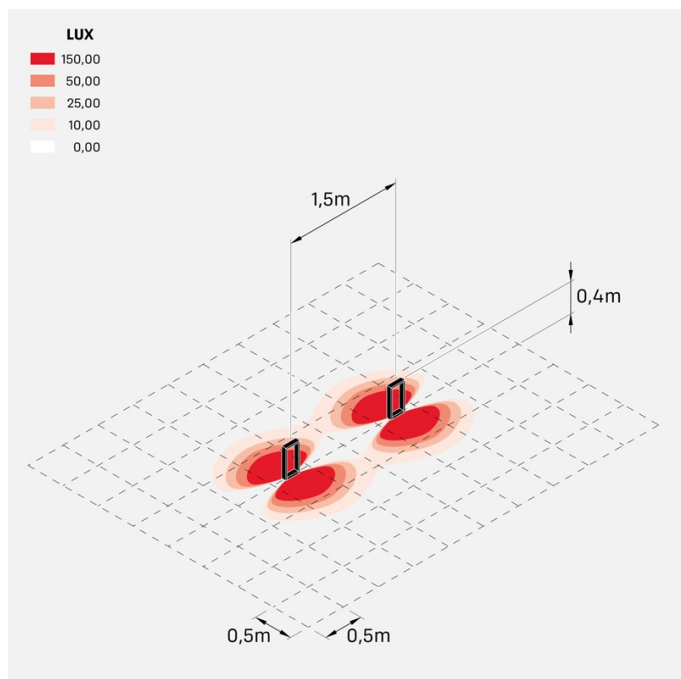

arke400_220v

Photometric curves:

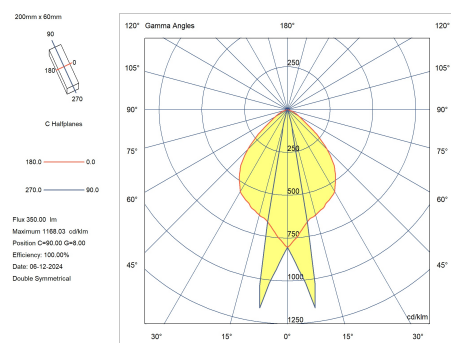

Lombardo S.r.l.

Via Pizzigoni 3, Villongo (BG) - 24060 - Italy - T 0039 035 939 411 - E info@lombardo.it

lombardo.it