


### Technical information:

|                                    |                     |
|------------------------------------|---------------------|
| Installation:                      | Ground, Post ground |
| Material:                          | Aluminium           |
| Finish:                            | Light Grey RAL 7044 |
| Treatment:                         | Sea Treatment       |
| Diffuser type:                     | Transparent glass   |
| Lamp type:                         | LED                 |
| Colour temperature:                | 2200K               |
| CRI:                               | >90                 |
| LB Factor:                         | L80B20 - 50.000h    |
| Step MacAdam:                      | 3                   |
| Photobiological risk:              | RG1                 |
| Power consumption (Watt):          | 6,5                 |
| Lumen:                             | 570                 |
| Real Lumen:                        | 350                 |
| Power supply:                      | ✓ integrated        |
| LED:                               | AC DIRECT           |
| Insulation class:                  | ⊕ CL.I              |
| Type of protection:                | <b>IP 66</b>        |
| Resistance to breakage:            | <b>IK 06 1J xx3</b> |
| Standards and Marks of Conformity: | CE UK CA            |
| Dimming                            | Phase cut           |


Customisable inner cover.



LL14121L1

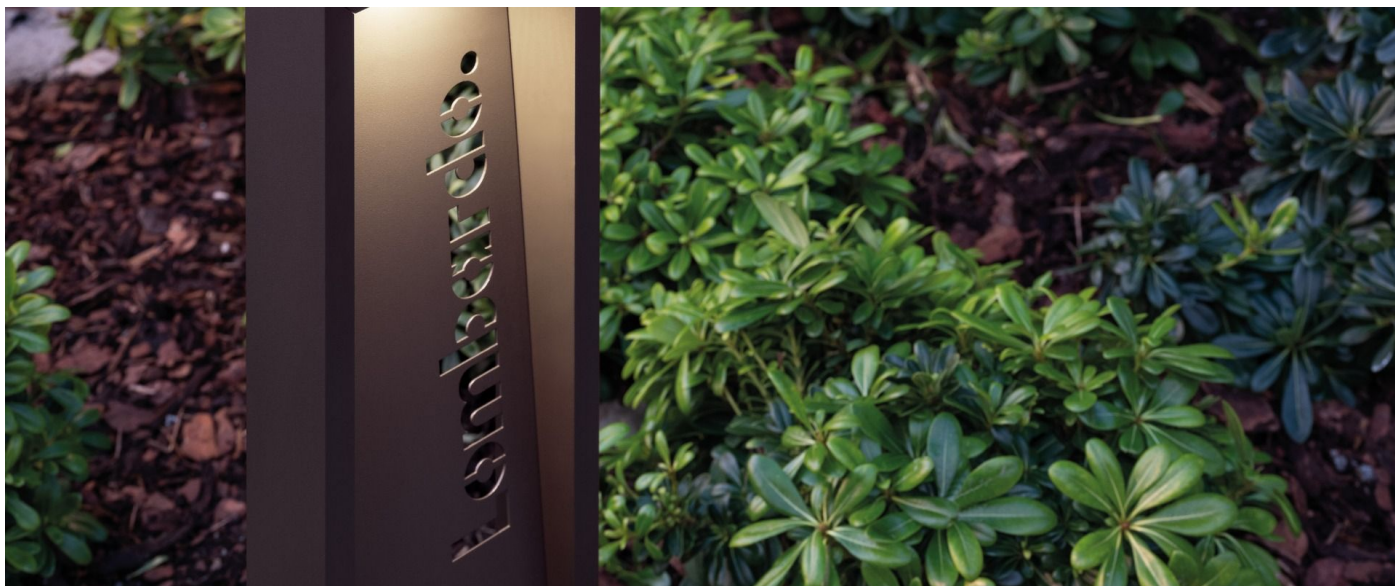


## Installation images:




LL14121L1

## Lighting simulation:

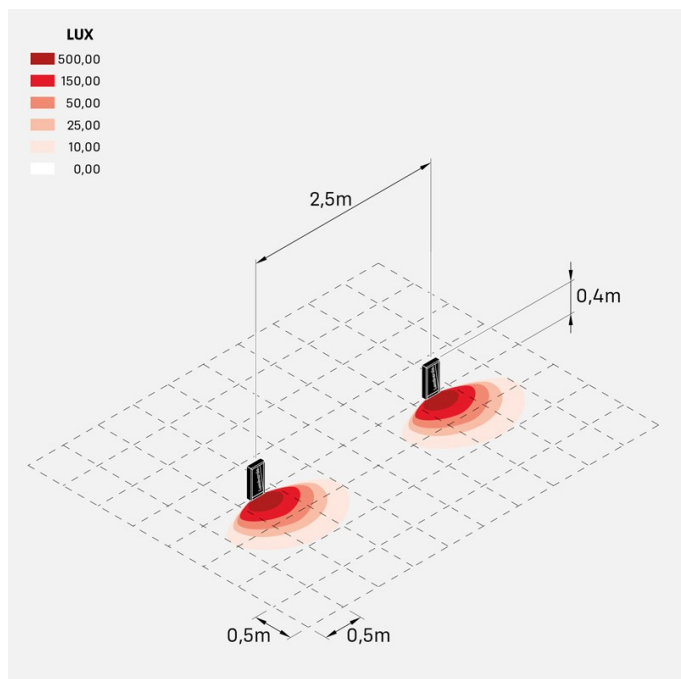

arke400\_full\_code\_220v

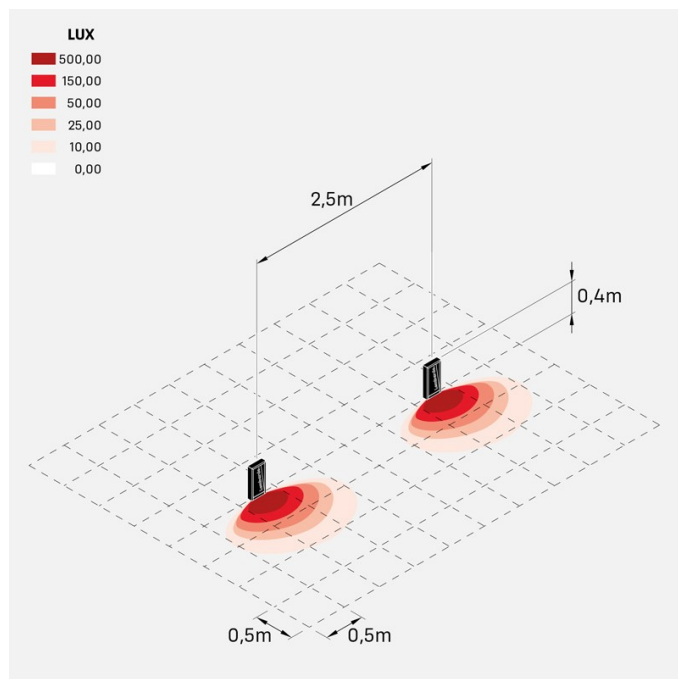

arke400\_full\_code\_24v