
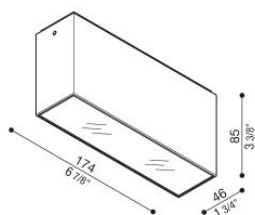


Kura Top X5

LL14706DS2

Lombardo.

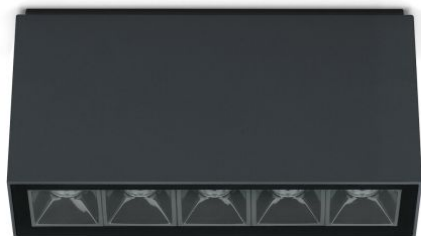

Technical information:


Installation:	Ceiling, Surface mounting ceiling
Material:	Aluminium
Finish:	Dark Grey RAL 7021
Diffuser type:	Serigraphed glass
Optics:	18°
Lamp type:	LED
Energy performance class:	F
Colour temperature:	2700K
CRI:	95
LB Factor:	L80B20 - 50.000h
Photobiological risk:	RG1
Power consumption (Watt):	12,5
Lumen:	1025
Real Lumen:	785
Power supply:	☑ integrated
LED:	220-240 V
Circuit breaker	/-/-22-36
	B10 - C10 - B16 - C16
Insulation class:	⊖ CL.I
Type of protection:	IP 65
Resistance to breakage:	IK 06 1J xx3
Standards and Marks of Conformity:	CE UK ENEC



Kura Top X5

LL14706DS2

Lombardo.

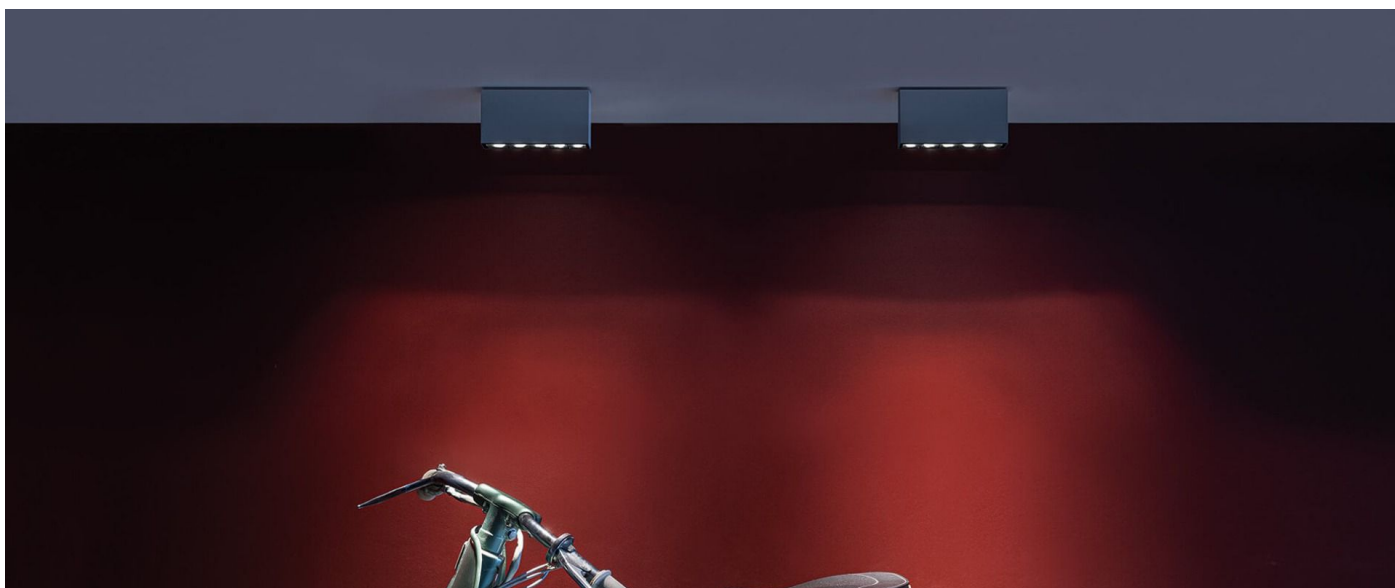


Kura Top X5

LL14706DS2

Lombardo.

Lighting simulation:

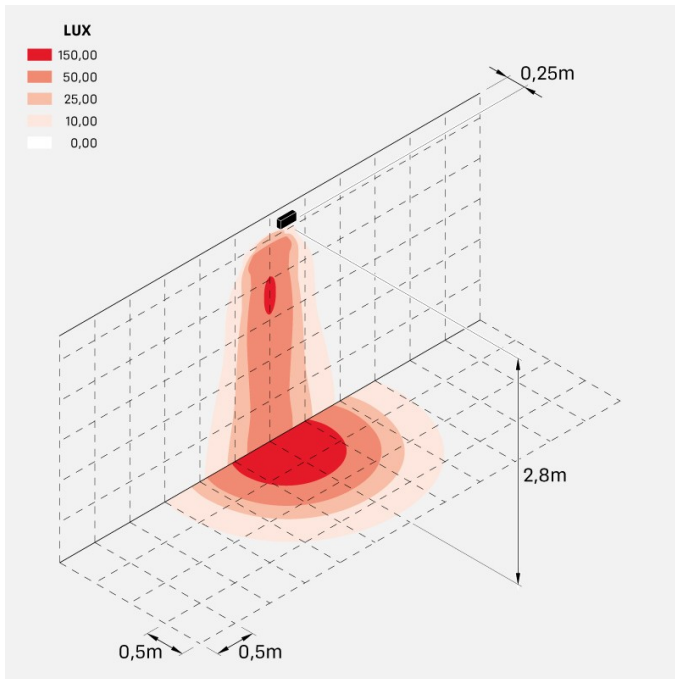

kura_top_x5_optic_s

Photometric curves:

