


Arke Full 400

LT14111W1

Lombardo.



Technical information:

Installation:	Ground, Post ground
Material:	Aluminium
Finish:	White RAL 9010
Treatment:	Sea Treatment
Diffuser type:	Transparent glass
Lamp type:	LED
Colour temperature:	2200K
CRI:	>90
LB Factor:	L80B20 - 50.000h
Step MacAdam:	3
Photobiological risk:	RG1
Power consumption (Watt):	6,5
Lumen:	720
Real Lumen:	440
Power supply:	⊗ not included
LED:	24V
Insulation class:	⏏ CL.III
Type of protection:	IP 66
Resistance to breakage:	IK 06 1J xx3
Standards and Marks of Conformity:	CE ^{UK} _{CA}



Arke Full 400

LT14111W1

Lombardo.



Installation images:



Lombardo S.r.l.

Via Pizzigoni 3, Villongo (BG) - 24060 - Italy - T 0039 035 939 411 - E info@lombardo.it


lombardo.it

Arke Full 400


LT14111W1

Lombardo.

Lighting simulation:

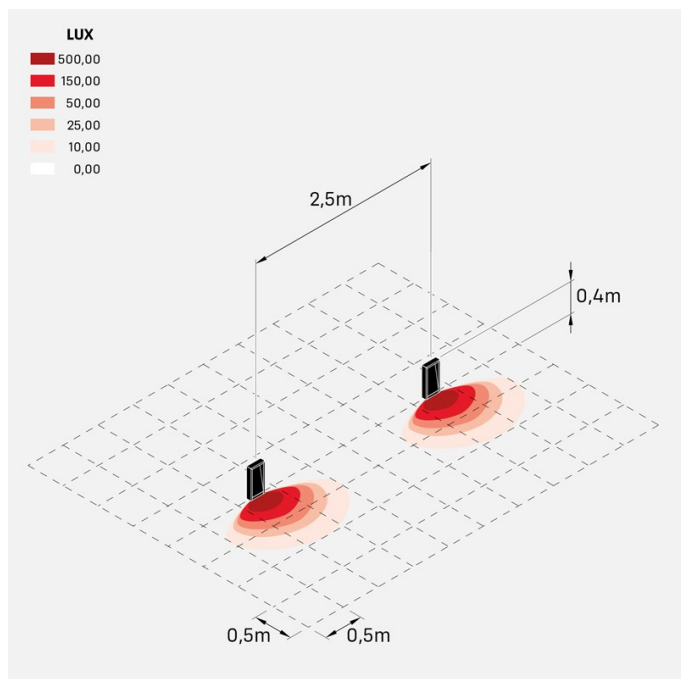

arke400_full_220v

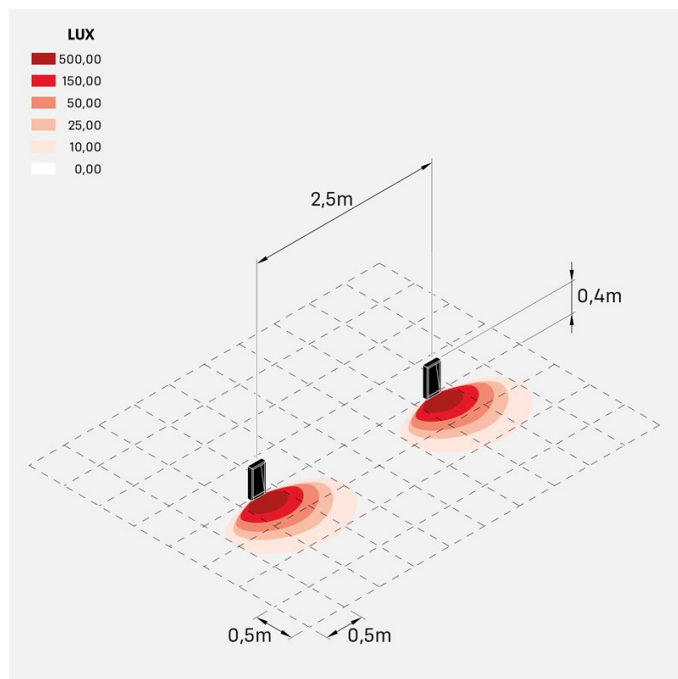

arke400_full_24v

Photometric curves:

