
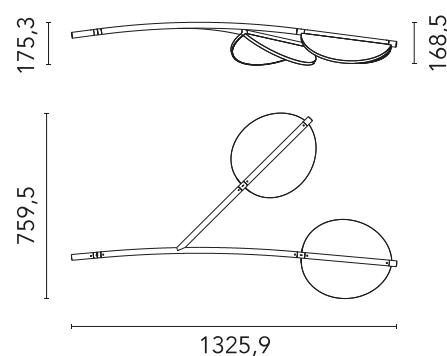


## Almendra Organic Suspension Short 2

Designed by Patricia Urquiola, 2022

30W - 892lm - 2700K - CRI> 95

Suspension lamp with diffused light emission available in linear and organic compositions. Tubular structure made of aluminium and CNC aluminium terminals with matte or metallized finish. Edge Lighting technology integrated. Light units can be turned by steps of 60° within the structure in order to change the direction of the light emitted. Metal rosette with matte white finish. The integrated electronics in the ceiling rose allow the use of different dimming systems: 1-10V, DALI, push-dim or potentiometer. Useful length of the cable 3 mt. The product has been designed according to the ISCC standards and it is assembled with total absence of glued components so that it can be completely separated for future recyclability.

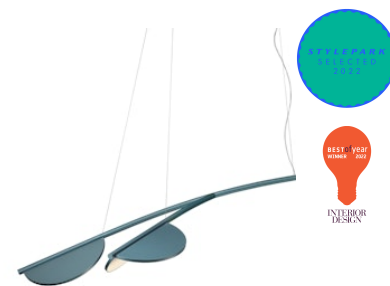

Are you a professional and your project needs consulting and support?

[BOOK AN APPOINTMENT](#)

### Main specifications

EAN	8059607048641
Mounting	Suspension
Environments	Indoor dry location
Light source type	LED
Light sources included	Yes
LED type	Edge Lighting
Power (W)	30
Lumen Output (lm)	892

### Physical

Colour	Bay Blue Metallized
Length (mm)	1326
Cord colour	Clear
Cord length (mm)	2600
Canopy colour	White
Canopy length/diameter (mm)	799
Canopy width (mm)	70
Canopy height (mm)	39
Net weight (kg)	8.17
Package volume (m3)	0.21
IP internal	20

### Download

Mounting instructions [↓ PDF](#)

### Photometric Files


LDT / IES [↓ LDT](#)

### Technical Drawings

2D [↓ ZIP](#)


3D [↓ ZIP](#)

[Bim](#) [↓ ZIP](#)

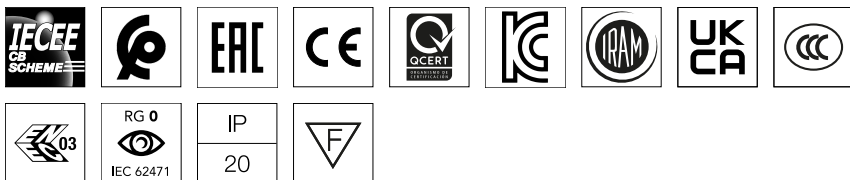


## Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class E




Replaceable (LED only) light source by a professional



Replaceable control gear by a professional

## Schematic light drawing




## Photometric

Lighting type	Direct
Light distribution	Symmetric
CCT (K)	2700
CRI>	95


## Electrical

Insulation class	I
Frequency (Hz)	50/60
Main voltage (Vac)	220-240
Power supply	Integrated
Dimmable	Yes
Power supply type	Dimmable 0-10V, Dimmable Push, Dimmable 1-10V, Dimmable DALI 1
Dimming interface	Remote Dimmable (Dimmer Not Included)

Spare Parts

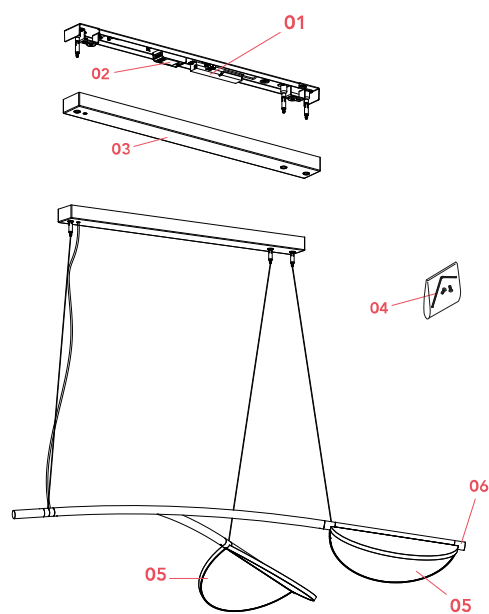

01.	Driver 96W 48V 220-240V	RF32405
02.	Led dimmer kit	RF34197
03.	Almendra S Y white cover	RF0429109
04.	Kit with screws and allen key	RF3160100
05.	Assembly Almendra Suspension Body Bay Blue Metallized	RF32518
06.	Almendra S Arc/Y terminal joint L31 Met. Green	RF33250

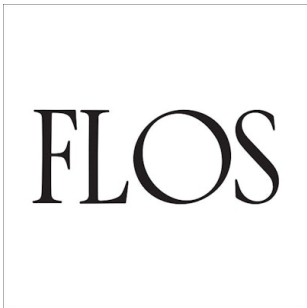

RF32405  
Driver 96W 48V 220-240V



RF34197  
Led dimmer kit



RF0429109  
Almendra S Y white cover



RF3160100  
Kit with screws and allen key



RF32518  
Assembly Almendra Suspension  
Body Bay Blue Metallized



RF33250  
Almendra S Arc/Y terminal joint  
L31 Met. Green