

## Bellhop Table

Designed by Edward Barber and Jay Osgerby, 2018


3W - 151lm - 2700K



Rechargeable direct light table lighting device. Base and dome in coloured PC. Diffuser in Opaline injection moulded photo-engraved PC. 24-hours' autonomy, charging via Micro-USB-C. Push-button switch positioned on the base provides the 4-step dimmer function. Battery status indicator positioned under the base. USB-C charging cable included, useful length 120cm.

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT



### Main specifications

|                        |                     |
|------------------------|---------------------|
| EAN                    | 8059607001301       |
| Mounting               | Portable            |
| Environments           | Indoor dry location |
| Light source type      | LED                 |
| Light sources included | Yes                 |
| LED type               | LED Module          |
| Power (W)              | 3                   |
| Lumen Output (lm)      | 151                 |

### Physical

|                     |      |
|---------------------|------|
| Colour              | Grey |
| Length (mm)         | 125  |
| Net weight (kg)     | 1.3  |
| Package height (mm) | 200  |
| Package width (mm)  | 200  |
| Package length (mm) | 330  |
| Package volume (m3) | 0.01 |
| IP internal         | 20   |

### Download

Mounting instructions [Download PDF](#)

Dimmers or chargers compatible [Download PDF](#)

### Photometric Files

LDT / IES [Download LDT](#)


### Technical Drawings

2D [Download ZIP](#)

3D [Download ZIP](#)



Schematic light drawing



Photometric


|                    |                |
|--------------------|----------------|
| Light distribution | Roto symmetric |
| CCT (K)            | 2700           |
| Extreme cut off    | No             |

Electrical


|                           |                   |
|---------------------------|-------------------|
| Insulation class          | III               |
| Frequency (Hz)            | 50/60             |
| Main voltage (Vac)        | 100-240           |
| Power supply              | Remote excluded   |
| Dimmable                  | Yes               |
| Power supply type         | Electronic 5V     |
| Dimming interface         | Dimmer Integrated |
| Batteries inside          | Yes               |
| Battery type              | LI-PO             |
| Charging max power        | 14                |
| Charging min time         | 3H - 0% TO 100%   |
| Charging socket/connector | USB-C             |

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class C




Replaceable (LED only) light source by a professional



Replaceable control gear by an end-user

Spare Parts

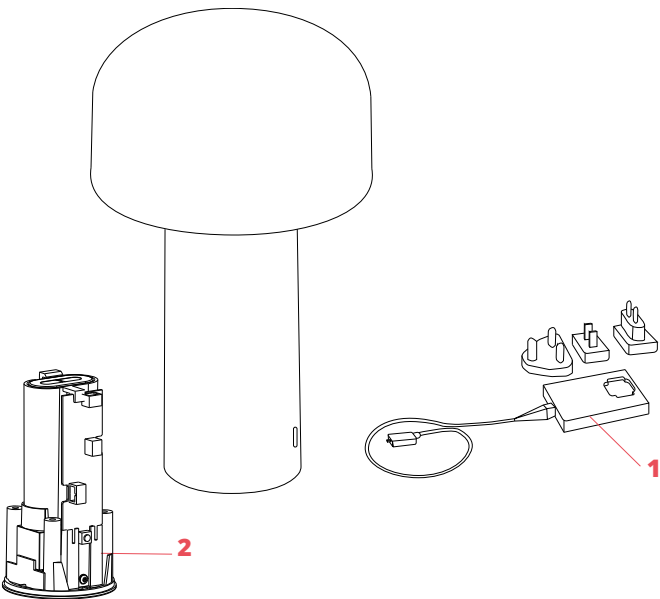

- |     |                                             |           |
|-----|---------------------------------------------|-----------|
| 01. | Power charger with electrical cable & plugs | RF1035109 |
| 02. | Bellhop T Base assembly new type            | RF36376   |



RF1035109

Power charger with electrical  
cable & plugs



RF36376

Bellhop T Base assembly new  
type