

Bellhop Table

Designed by Edward Barber and Jay Osgerby, 2018


3W - 151lm - 2700K



Rechargeable direct light table lighting device. Base and dome in coloured PC. Diffuser in Opaline injection moulded photo-engraved PC. 24-hours' autonomy, charging via Micro-USB-C. Push-button switch positioned on the base provides the 4-step dimmer function. Battery status indicator positioned under the base. USB-C charging cable included, useful length 120cm.

Are you a professional and your project needs consulting and support?

BOOK AN APPOINTMENT



Main specifications

EAN	8059607001318
Mounting	Portable
Environments	Indoor dry location
Light source type	LED
Light sources included	Yes
LED type	LED Module
Power (W)	3
Lumen Output (lm)	151

Physical

Colour	Cioko
Length (mm)	125
Net weight (kg)	1.3
Package height (mm)	200
Package width (mm)	200
Package length (mm)	330
Package volume (m3)	0.01
IP internal	20

Download

Mounting instructions [Download PDF](#)

Dimmers or chargers compatible [Download PDF](#)

Photometric Files

LDT / IES [Download LDT](#)


Technical Drawings

2D [Download ZIP](#)

3D [Download ZIP](#)



Schematic light drawing



Photometric

Light distribution	Roto symmetric
CCT (K)	2700
Extreme cut off	No

Electrical

Insulation class	III
Frequency (Hz)	50/60
Main voltage (Vac)	100-240
Power supply	Remote excluded
Dimmable	Yes
Power supply type	Electronic 5V
Dimming interface	Dimmer Integrated
Batteries inside	Yes
Battery type	LI-PO
Charging max power	14
Charging min time	3H - 0% TO 100%
Charging socket/connector	USB-C

Ecodesign and Energy Labelling

This product contains a light source of energy efficiency class C




Replaceable (LED only) light source by a professional



Replaceable control gear by an end-user

Spare Parts

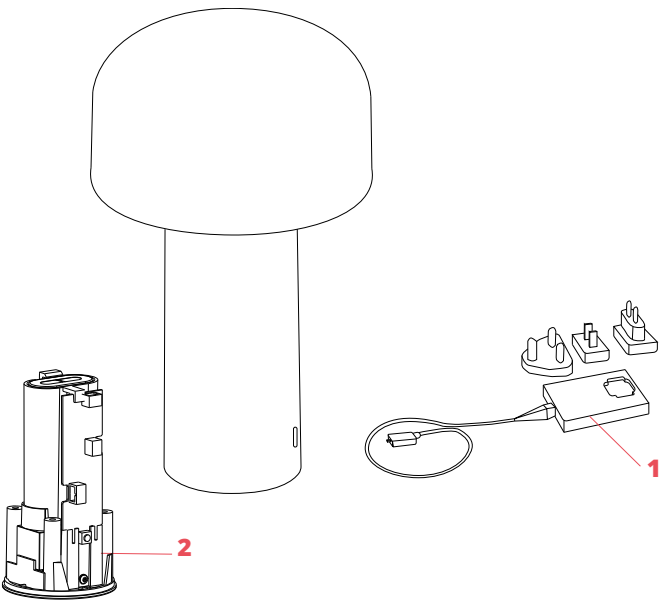

- | | | |
|-----|---|-----------|
| 01. | Power charger with electrical cable & plugs | RF1035109 |
| 02. | Bellhop T Base assembly new type | RF36376 |



RF1035109

Power charger with electrical
cable & plugs



RF36376

Bellhop T Base assembly new
type