



F1367031 Matte Black

Smithfield Suspension Pro

Designed by Jasper Morrison, 2009



45W - 2791Im - 2700K - CRI> 95

Suspension lamp with direct light. Aluminium body. Available in gloss black, matte black, red, green, white or MUD. Injection-moulded opalescent methacrylate diffuser. Steel ceiling attachment with steel suspension cable, 5 pole electric cable in PTFE double insulation, working length 2700mm.

Are you a professional and your project needs consulting and support?


BOOK AN APPOINTMENT

Main specifications

EAN	8059607014981
Mounting	Suspension
Environments	Indoor dry location
Light source type	LED
Light sources included	Yes
LED type	LED Module
Power (W)	45
Lumen Output (lm)	2791

Physical

Colour	Matte Black
Length (mm)	600
Cord colour	Clear
Cord length (mm)	2700
Canopy colour	Matte Black
Canopy length/diameter (mm)	146
Canopy height (mm)	36
Net weight (kg)	5.8
Package height (mm)	310
Package width (mm)	710
Package length (mm)	710
Package volume (m3)	0.16
IP internal	20



Download Mounting instructions	⊥ PDF	
Photometric Files	<u>↓</u> LDT	
Technical Drawings		
Technical Drawings		
Technical Drawings	⊥ ZIP	
	<u>↓</u> ZIP	
2D		

https://professional.flos.com/en/global/product/smithfield-suspension-pro-f1367031/

















Ecodesign and Energy

This product contains a light

source of energy efficiency

Replaceable (LED only)

light source by a professional

Replaceable control gear by a professional

Labelling

class F









Roto symmetric

2700

95

No

Schematic light drawing



Electrical

Insulation class	1
Frequency (Hz)	50/60
Main voltage (Vac)	220-240
Power supply	Integrated
Power supply type	Dimmable Push

Jost L		900
£+	XXXXX	ŤΉ
600	$\langle \rangle \rangle \langle \rangle \rangle \langle \rangle \rangle \langle \rangle \langle \rangle \rangle \langle \rangle \langle \rangle \langle \rangle$	(60%
\times		$\cancel{\mathbb{N}}$
X	XX	
30°	922 cd	30°
Lumir	nous flux l um	ninaire


2623 lm

Photometric

Extreme cut off

CCT (K)

Spare Parts

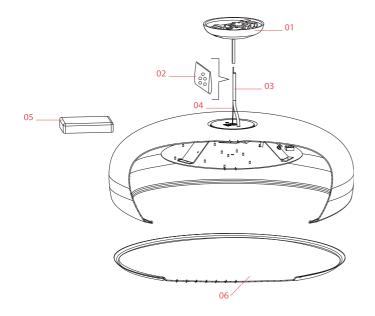

01.	Opal black ceiling rose assembly	RF641043
02.	Kit of 5 or rings	RF05382
03.	Smithfiled Suspension 2,7mt	RF29934
	fep/pvc 5x0,75 transparent cable	
04.	3 mt steel cable ø1,2 with 19	RF29665
	winded wires	
05.	Driver 60W 500-1400mA 200-	RF31674
	240V	
06.	Methacrylate diffuser	RF19022

Smithfiled Suspension 2,7mt fep/pvc 5x0,75 transparent cable



00000



RF6410431

RF05382

Opal black ceiling rose assembly

Kit of 5 or rings

RF29665

3 mt steel cable ø1,2 with 19 winded wires





RF31674

Driver 60W 500-1400mA 200-240V

RF19022

Methacrylate diffuser