


IP20 

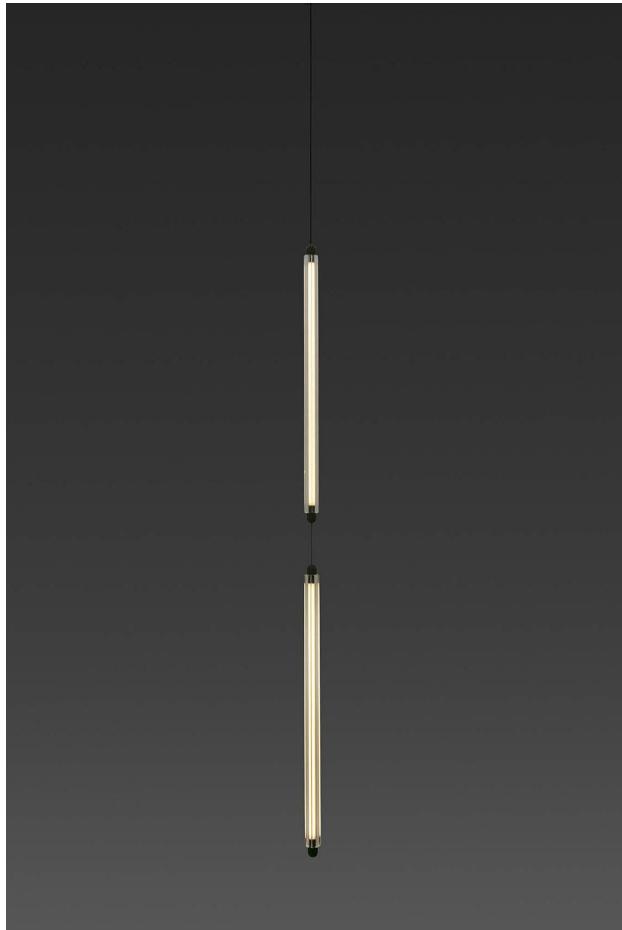

Mounting	Ceiling
Voltage (V)	220V-240V
Hertz	50/60Hz
Class	II
IP	20
Power (W)	60
Energy class light source	G
Light source	SMD LED
Lifespan	50.000h L70 B10
Luminous Flux (lm)	1210
Color temperature (K)	2200K
Dimmable luminaire (W)	No
Opening angle degrees	270
Light orientation	Indirect lighting
Photobiological risk	1
CRI	92
Control System	On/off
Driver included	Yes
Cable length	1500 mm
Structure material	CRISTAL + POLIAMIDA
Diffuser material	PC
Structure finish	Transparent+Matt Black
RAL/Pantone shade	9011
Diffuser finish	Opal

 Energy label

 Photometric

