

## RefLED Retro Superia ES50 DIMMABLE

*RefLED Superia Retro ES50 V3 580LM DIM 840 36 SL*  
0029142



### Product features

- Premium performance professional LED GU10 range with the same look and feel of traditional halogen GU10 lamp
- Recreates backlight effect similar to halogen dichroic lamps
- Full glass design - means no colours clashing between lamp and fixture
- Very long lifetime of up to 25,000 hours
- COOLFIT functionality - ensures overheat and over temperature protection
- High switching cycles: >100,000
- High colour rendering: CRI80
- Dimmable with approved dimmers
- Warranty: 5 Years



## PRODUCT OVERVIEW

|                                 |   |
|---------------------------------|---|
| Product name                    | RefLED Superia Retro ES50 V3 580LM DIM 840 36 SL                                    |
| Technology                      | LED   |
| Watt (Rated) (W)                | 6   |
| Type                            | LED exchangeable  |
| Cap/Base                        | GU10  |
| Fixture rating                  | Open  |
| General application             | Education, Hospitality, Museums & Galleries, Office, Residential & Consumer, Retail |
| ETIM Class                      | EC001959  |
| E-number FI                     | 4741034   |
| Warranty                        | 5 years   |
| Colour temperature (K)          | 4000  |
| Light colour                    | Cool White  |
| CRI (Ra)                        | 80  |
| Colour Variation Initial (SDCM) | SDCM6   |
| Colour Consistency (SDCM)       | 6   |
| Beam Angle (°)                  | 36  |
| Photobiological Risk Group      | RG1   |
| Wattage (W)                     | 6   |
| Product Voltage (V)             | 230   |
| Dimmable                        | Yes   |
| Average life (Nominal) (h)      | 25000   |
| Product EAN number              | 5410288291420   |

## DATA TABLE

### General data

|                  |  |
|------------------|--|
| Product name     | RefLED Superia Retro ES50 V3 580LM DIM 840 36 SL |
| Technology       | LED  |
| Watt (Rated) (W) | 6  |
| Type             | LED exchangeable                                 |
| Cap/Base         | GU10   |

## RefLED Retro Superia ES50 DIMMABLE

*RefLED Superia Retro ES50 V3 580LM DIM 840 36 SL*  
0029142

|   |   |
|---|---|
| Fixture rating                          | Open  |
| General application                     | Education, Hospitality, Museums & Galleries, Office, Residential & Consumer, Retail |
| Operating temperature range (°C)        | -20°C - 50°C  |
| Performance ambient temperature Tq (°C) | 25  |
| ETIM Class                              | EC001959  |
| E-number FI                             | 4741034   |
| Warranty                                | 5 years   |

### Optical data

|  |            |
|--|------------|
| Colour temperature (K)                       | 4000       |
| Light colour                                 | Cool White |
| CRI (Ra)                                     | 80         |
| Colour Variation Initial (SDCM)              | SDCM6      |
| Colour Consistency (SDCM)                    | 6          |
| Luminous Intensity (cd)                      | 1080       |
| Beam Angle (°)                               | 36         |
| Photobiological Risk Group                   | RG1        |
| Lumen maintenance at end of nominal life (%) | 70         |

### Electrical data

|   |         |
|---|---------|
| Wattage (W)                                       | 6       |
| Equivalent watt (W)                               | 80      |
| Product Voltage (V)                               | 230     |
| Control gear required                             | No      |
| No. Of switching cycles before premature failures | >100000 |
| Transformer required                              | No      |
| Dimmable  | Yes     |
| Inrush Current (A)                                | 0.51    |
| Inrush Duration (µs)                              | 22      |
| Lamp Energy Label (class)                         | E       |
| Nominal Frequency (Hz)                            | 50/60Hz |
| Max. Luminaires per 16A C Breaker                 | 593     |
| Max. Luminaires per 16A B Breaker                 | 593     |

### Lifetime data

|                            |       |
|----------------------------|-------|
| Lifespan L70 B50           | 25000 |
| Average life (Nominal) (h) | 25000 |
| Average life (Rated) (h)   | 25000 |

### Physical data

|                               |      |
|-------------------------------|------|
| Nominal Product Height (mm)   | 54   |
| Nominal Product Diameter (mm) | 50   |
| Weight (kg)                   | 0.05 |

### Packaging

|                       |        |
|-----------------------|--------|
| Single packaging type | Carton |
|-----------------------|--------|

## RefLED Retro Superia ES50 DIMMABLE


*RefLED Superia Retro ES50 V3 580LM DIM 840 36 SL*  
0029142

|                                       |                |
|---------------------------------------|----------------|
| Product EAN number                    | 5410288291420  |
| Packaging single length / height (cm) | 8.2            |
| Packaging single width (cm)           | 6.1            |
| Packaging single depth (cm)           | 5.1            |
| DUN14 (inner)                         | 25410288291424 |
| Units per inner package               | 6              |
| Packaging inner length / height (cm)  | 9.2            |
| Packaging inner width (cm)            | 16.4           |
| Packaging inner depth (cm)            | 13.1           |
| DUN14 (outer)                         | 15410288291427 |
| Units per outer package               | 60             |
| Packaging outer length / height (cm)  | 20.8           |
| Packaging outer width (cm)            | 17.8           |
| Packaging outer depth (cm)            | 68.5           |


### Safety data

|                                     |                                |
|-------------------------------------|--------------------------------|
| Optimal operating condition (°C)    | -20-50                         |
| Breakage cleaning instructions      | Not applicable                 |
| Special purpose lamp                | No                             |
| Dry applications use only           | Yes                            |
| Suitable for household illumination | Yes                            |
| Safety message                      | Dimmable with approved dimmers |

## PHOTOMETRY

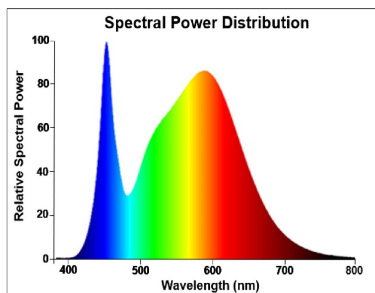

## TECHNICAL DRAWINGS




RefLED Retro Superia ES50 DIMMABLE  
*RefLED Superia Retro ES50 V3 580LM DIM 840 36 SL*  
0029142



**SYLVANIA**

0029142

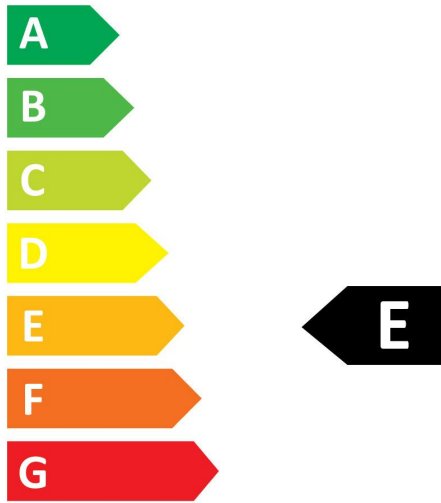

**6**  
kWh/1000h




2019/2015

RefLED Retro Superia ES50 DIMMABLE  
*RefLED Superia Retro ES50 V3 580LM DIM 840 36 SL*  
0029142



0029142

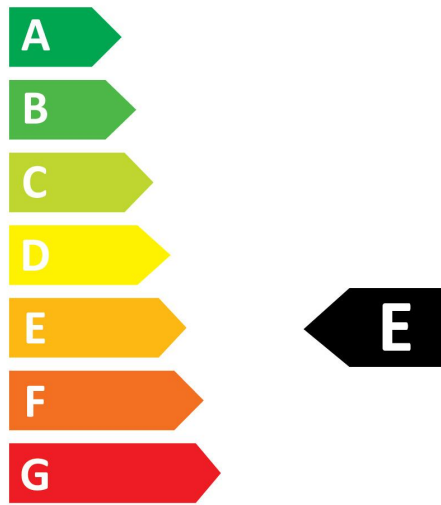

**6**  
kWh/1000h



2019/2015