


AELÍS 521A-L0213B-03

Wall Bracket AELÍS IP65 LED SMD 13W 1050lm CRI80 4000K Grey

Apply Aelis is made of technopolymer with IP65 in gray color with a diameter of 26cm, it is installed both on the wall and on the ceiling. The emission temperature is 4000K. It is suitable for lighting residential areas outside.

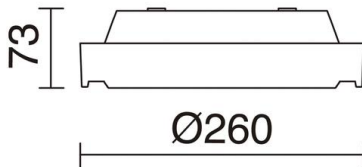

GENERAL DATA

Category	Surface
Family	Aelis
Finish	[o3] Grey
Location	Outdoor
Installation	Ceiling, Wall
Body material	Technopolymer
Diffuser material	Opal polycarbonate
ETIM class	EC0028g2
EAN	8435258611814

LIGHT SOURCES AND BEAMS

Sources	LED SMD 13W max. 1050lm 4000K CRI80
Energy efficiency	G
Beam	Direct symmetric

TECHNICAL DATA

Dimensions	Height x Width x Length (mm): 260 x 260 x 73
IP	IP65
Protection class	Class II
Frequency	50/60 Hz
Input voltage	220-240V AC V
Output current	300 mA
Power factor	0.9
Auxiliary gear	Electronic
Auxiliary equipment brand	Eaglerise
Lifetime	30,000 h
LED lifetime L	80
LED lifetime B	50
Weight	0.8 Kg
Cable outlets	1
ECORAAE category I	LED-B
ECORAAE I	0.5
Flammable surfaces	Yes

NOTES

Luminaire suitable for installation in environments with saline atmosphere

AELÍS

521A-L0213B-03

Wall Bracket AELÍS IP65 LED SMD 13W 1050lm CRI80 4000K Grey

COMPLEMENTARY IMAGES

