


# PANDORA 758A-L3310B-01 Recessed ceiling PANDORA IP44 LED SMD 10W 875lm CRI85 4000K 64° White

PANDORA is the family of LED recessed ceiling lights with three sizes / powers in a circular version and two square. Its IP44 reinforces its versatility. Adjustability.



### GENERAL DATA

Category	Recessed
Family	Pandora
Finish	[01] White
Location	Indoor
Installation	Ceiling
Body material	Aluminum
Diffuser material	Prismatic glass
Frame material	Aluminum
Reflector material	Faceted aluminum
ETIM class	EC001744
EAN	8433264015732

### LIGHT SOURCES AND BEAMS


Sources	LED SMD 10W max. 875lm 4000K CRI85
Energy efficiency	A+
Beam	64° - Direct symmetric

### TECHNICAL DATA

Dimensions	Height x Width x Length (mm): 106 x 106 x 50
IP	IP44
Protection class	Class II
Frequency	50/60 Hz
Input voltage	220-240V AC V
Output current	250 mA
Power factor	0.95
Lifetime	50,000 h
LED lifetime L	80
LED lifetime B	20
Weight	0.575 Kg
Cut hole dimensions	Diameter (mm): 92
ECORAAE category I	LED-A



### PHOTOMETRIC DATA

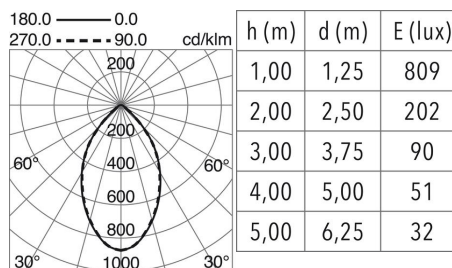

### NOTES

Finishes upon request: Black, Grey

**PANDORA** 758A-L3310B-01 Recessed ceiling PANDORA IP44 LED SMD 10W 875lm CRI85  
4000K 64° White

# PANDORA

758A-L3310B-01 Recessed ceiling PANDORA IP44 LED SMD 10W 875lm CRI85  
4000K 64° White

PRODUCTS OF THE SAME FAMILY

---



Pandora Round L Pandora Round M Pandora Square M